

CS-DC

Capacidad Capacity - Capacité
10 - 15 - 20 - 25 - 30 - 35 - 40 - 100 t



Certificate
N° E-02.02.C02



R60/2000-ES1-10.01

Célula de carga DIGITAL a compresión

DIGITAL Compression load cell

Capteur NUMÉRIQUE à compression

Totalmente en acero inoxidable

Fully stainless steel

Totalement acier inoxydable

Totalmente soldada.

Estanqueidad IP-68 (EN 60529)

Fully welded. Protected against humidity IP-68 (EN 60529)

Totalement soudée. Etanchéité IP-68 (EN 60529)

Ajuste de ángulos por software

Software corner adjustment

Ajustement d'angles par logiciel

Sistema calibrado de fábrica, conectar y pesar

Plug & Weigh System, calibrated from factory

Système d'étalonnage de l'usine, brancher et peser

Conectores IP-68

IP-68 Connectors

Connecteurs IP-68

Disponible cable metálico antirroedores

Available cable with metallic cover

Câble métallique anti rongeurs disponible

Características técnicas

Technical Data

Caractéristiques Techniques

Clase de precisión

Accuracy class

C6

Classe de précision

Tensión de alimentación

Excitation Voltage

8÷15 V

Tension d'alimentation

Resistencia de entrada

Input Resistance

570 ± 3Ω

Résistance d'entrée

Consumo de corriente

Current consumption

35 mA

Consommation électrique

Velocidad de transmisión

Transmission speed

100 kHz (Max)

Vitesse de transmission

Conversiones por segundo

Conversions per second

40 s⁻¹

Conversions par seconde

Resolución interna

Internal resolution

24 bits

Résolution interne

Margen de temperatura compensado

Temperature Compensation

-10° C / +40° C

Compensation de température

Límites de temperatura

Temperature limits

-40° C / +80° C

Limites de température

Resistencia de aislamiento

Insulation resistance

> 5000 MΩ

Résistance d'isolement



165mm (±2mm)

Key highlight

- No junction card
- IP69k certified daisy chain design with director connection to indicator
- Anti rodent connector and cables



1ª célula conectada directamente al visor (sin caja suma)
1st load cell directly connected to the indicator (no junction box needed)
1er capteur connecté directement à l'indicateur (sans boîte de jonction)



Conexión inalámbrica
Wireless Connection
Connection sans fils



Conector plástico
Plastic connector
Connecteur plastique

A Malla Shield
B +Vcc Rojo Red / Rouge
C GND Negro Black / Noir
E SDA Blanco White / Blanc
F SCL Verde Green / Verte




Conector metálico
Metallic connector
Connecteur métallique

1 +Vcc Rojo Red / Rouge
2 SCL Verde Green / Verte
3 SDA Blanco White / Blanc
4 GND Negro Black / Noir
5 Malla Shield


Dimensiones en mm
Size in mm - Dimensions en mm

Conjunto Soporte CS Support Accessory CS Ensemble support modèle CS

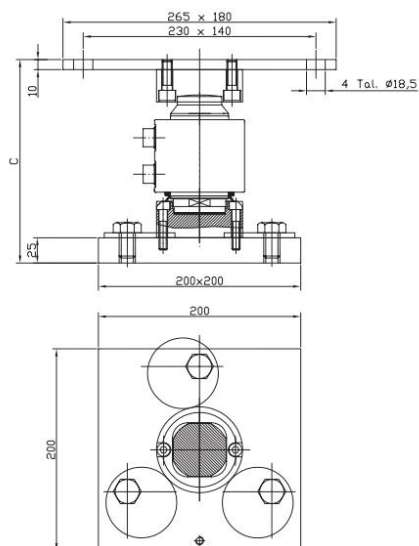


Capacidad (t) Capacity - Capacité	C
10 - 50	201.5
100	255

Conjunto Bases CS Bases Accessory CS Ensemble bases modèle CS

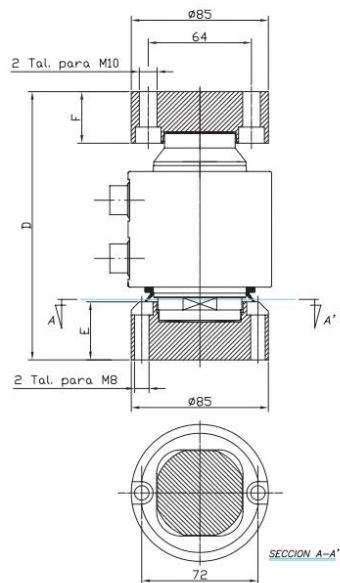

Capacidad (t) Capacity - Capacité	D	E	F
10 - 50	166.5	36	32
100	220	53	47

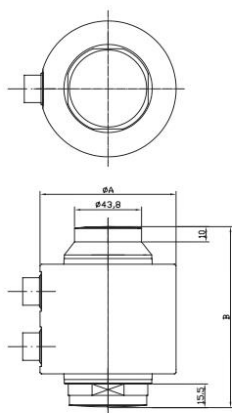

Capacidad (t) Capacity - Capacité	A	B
10 - 50	ø89	118,5
100	ø113,4	140

